



Quick Tips for Polycom RealPresence Mobile for Android Tablets

For more detailed information, refer to the Help for RealPresence Mobile application at support.polycom.com.

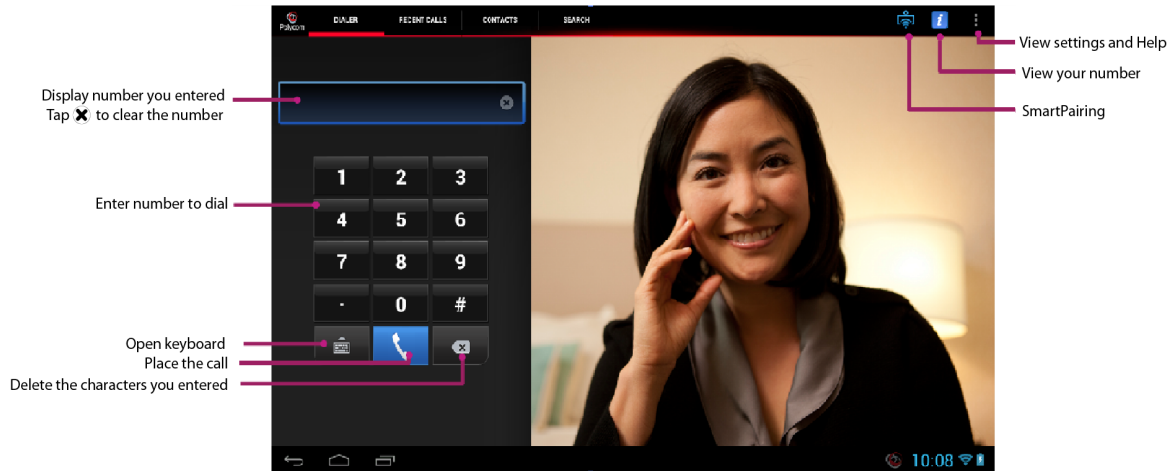

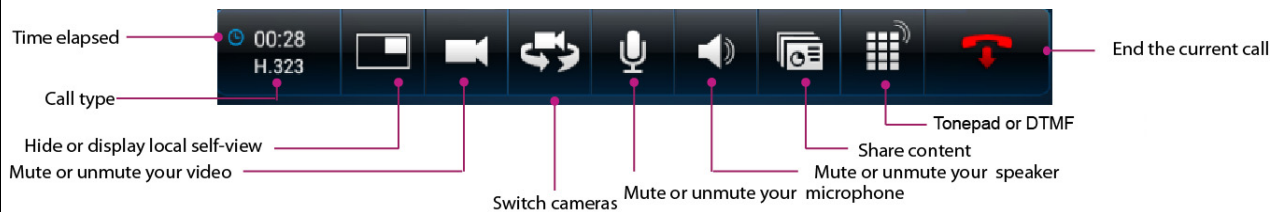

During a call, touch the screen to activate the in-call toolbar.



Place a Video Call


Enter a Name or Number

- 1 Touch **DIALER** and enter a name or number in any of the following formats:
 - 2555 (SIP user name or E.164 extension for H.323)
 - stereo.polycom.com (DNS name)
 - user@domain.com (SIP_username)@(domain.com)
 - 10.11.12.13##1234 (IP address)##(conference ID for H.323)
 - 10.11.12.13 (IP address)
 - 1234@10.11.12.13 (SIP user name)@(IP address)
- 2 Select the call type, if available.
- 3 Touch  to enter an extension or password.
- 4 Touch  to start the call.

Call from the Recent Calls List

- 1 Touch **RECENT CALLS**.
- 2 Touch an entry to call.

Call from the Corporate Directory

- 1 Touch **SEARCH** and touch inside the search box.
- 2 Enter all or part of a name, and then touch **Search**.
- 3 Touch the name from the search results.
- 4 Touch the device name and then touch .
- 5 Touch **Place Call (H.323)** or **Place Call (SIP)**.

Call from your Local Address Book

- 1 Touch **CONTACTS**.
- 2 Touch a contact or number.
- 3 Touch **Place Call (H.323)** or **Place Call (SIP)**.

Answer a Call

>> Touch .


Reject an Incoming Call or End a Call in Progress

>> Touch .








To sign out from the provisioning server:

- 1 Touch  on your device.
- 2 Touch **Sign Out**.

To force close the RealPresence Mobile application:

- 1 Touch **Settings**.
- 2 Touch **Apps**.
- 3 Touch  **Video**.
- 4 Touch **Force Stop**, and then touch **OK** to confirm.



Recent Call Connection Icons

Icon	Description
	Answered call
	Outgoing call
	Missed incoming call
	Unconnected outgoing call
	Poor network connection
	Unstable network connection
	Good network connection



Manage Contacts

Registering your RealPresence Mobile application to a provisioning server gives you access to LDAP service, enabling you to use a corporate directory.



To add a contact from a corporate directory

- 1 Touch **SEARCH**.
- 2 Enter all or part of the contact's name.
- 3 Touch the name from the search results.
- 4 Touch .
- 5 Touch .



To add a contact from the Recent Calls list

- 1 Touch **RECENT CALLS**.
- 2 Touch  for the number to add.
- 3 Enter contact information.
- 4 Touch .


To add a new contact manually

- 1 Touch **CONTACTS**, and then touch .
- 2 Enter the **Display Name**, **Device Name**, and either the **H.323 Extension**, **H.323 Name**, or **SIP URI**.
- 3 Touch .

To edit a contact

- 1 Touch **CONTACTS**, and then touch a contact.
- 2 Touch .
- 3 Edit the information, and then touch .

To delete a contact

- 1 Touch **CONTACTS**, and then touch a contact.
- 2 Touch the contact number you want to delete.
- 3 Touch , and then touch **Yes**.

To quickly locate a contact

- 1 Touch **CONTACTS**.
- 2 Touch a contact to view contact information.



Quick Tips for Polycom® RealPresence™ Mobile for Android Tablets